

ELEVATION




SECTION THOUGH LINE POST

BARBED WIRE DETAIL


N.T.S.

NOTE: FENCE HEIGHT DOES NOT INCLUDE BARBED WIRE

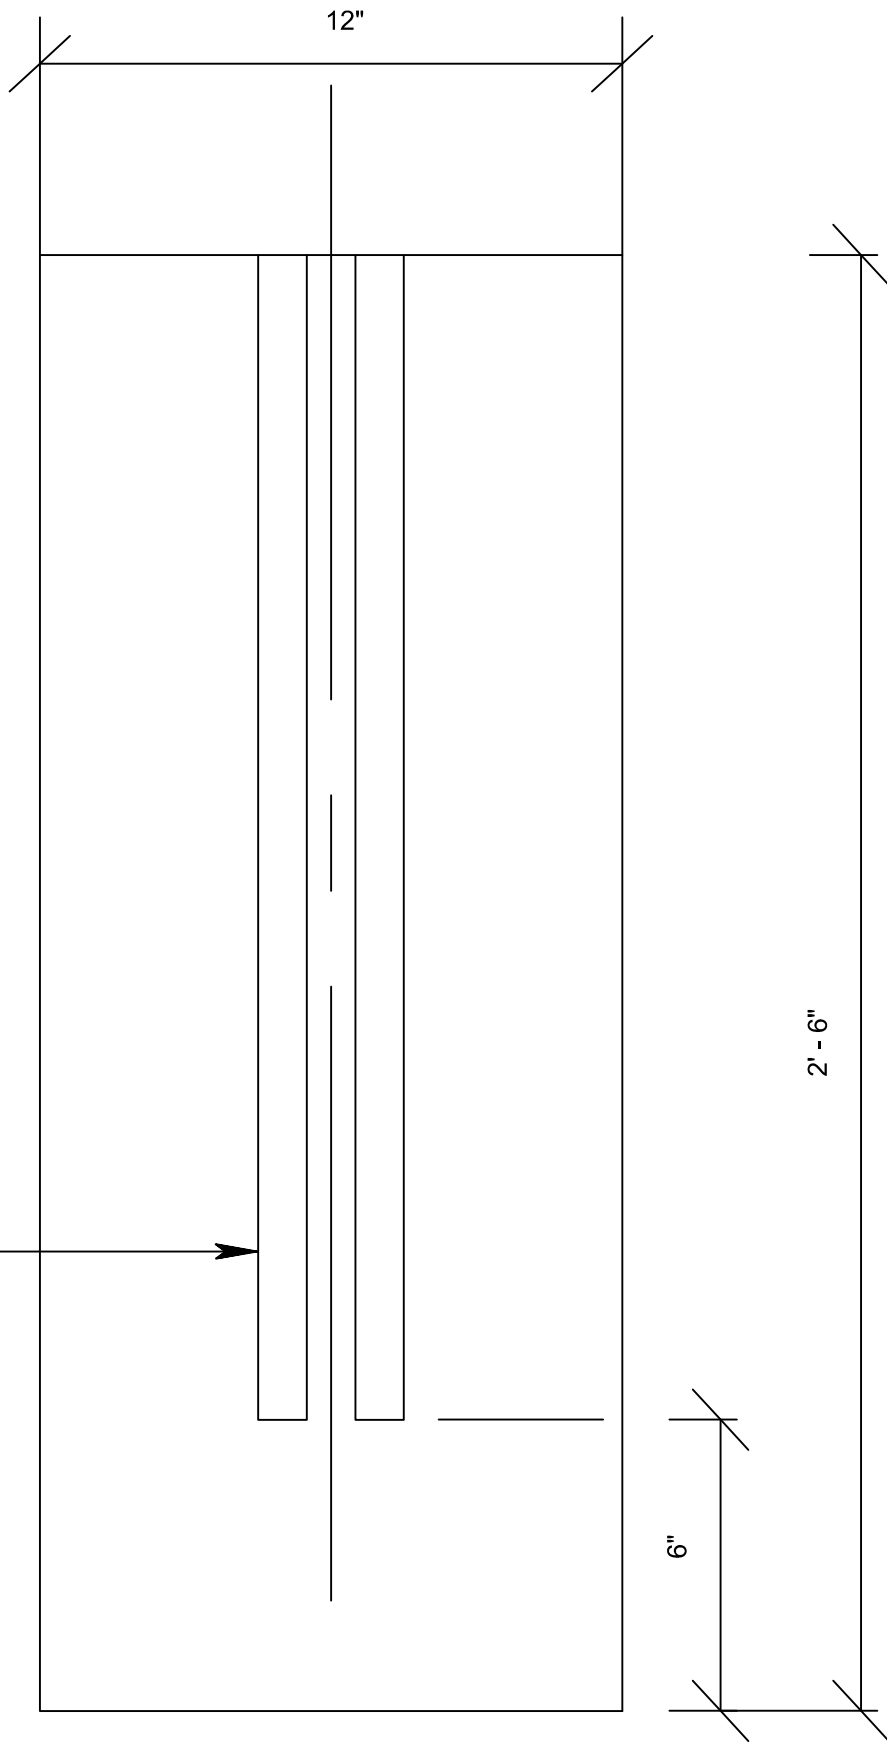

SECTION

GATE STOP SLEEVE EMBEDDED IN CONCRETE. SIZE AND LENGTH AS RECOMMENDED BY MANUFACTURER FOOTING AS SHOWN

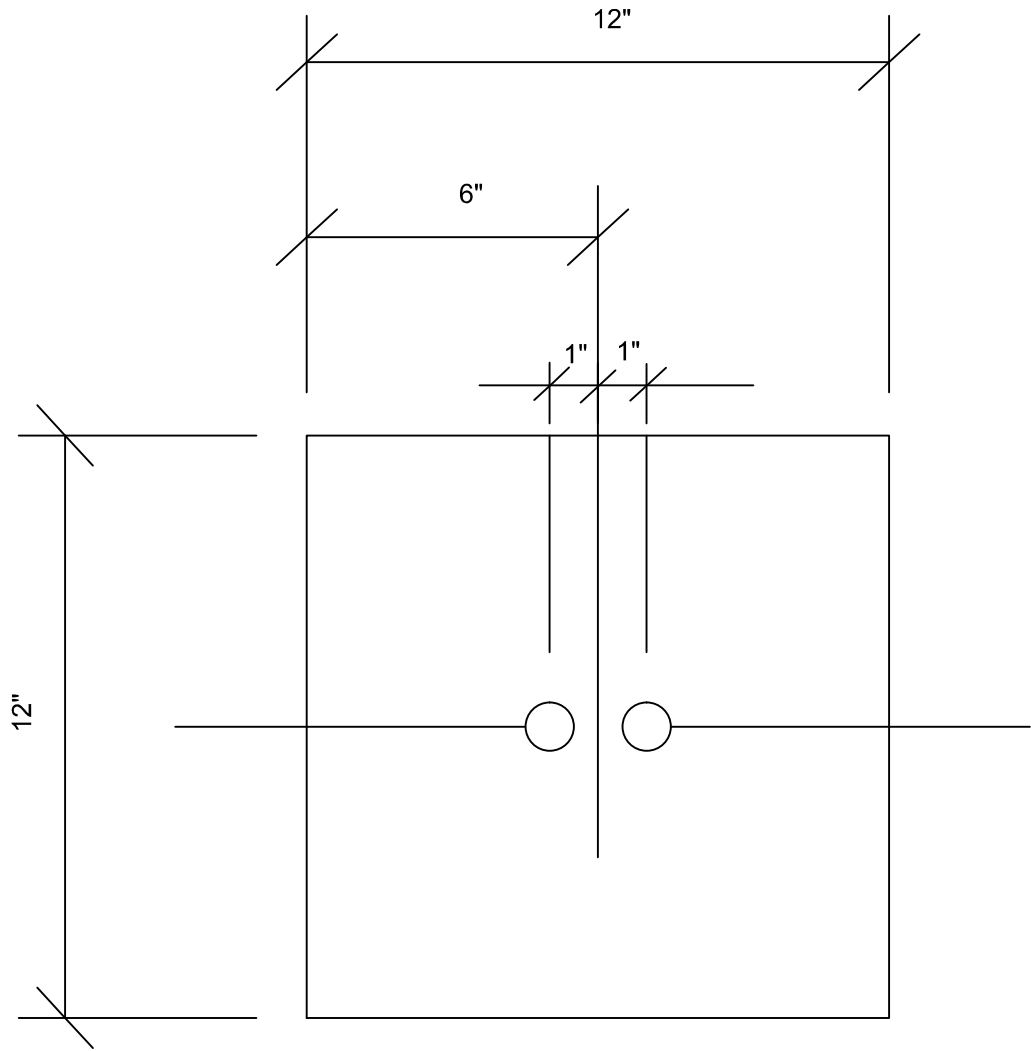

PLAN

GATE STOP DETAIL

N.T.S.

SPECIAL NOTES FOR CHAIN LINK FENCING

ALL CHAIN LINK FENCING AND GATES SAHLL BE TACK WELDED IN THE FOLLOWING MANNER TO PREVENT VANDALISM AND THEFT:

- EVERY OTHER NUT SHALL BE TACK WELDED TO BOLT THREADS.
- EVERY OTHER BRACE BAND SHALL BE TACK WELDED TO POSTS.
- ALL STRETCHER BARS SHALL BE TACK WELDED TO EVERY OTHER BRACE BAND.
- ALL BALL CAPS AND POST CAPS SHALL BE TACK WELDED TO POSTS.
- FENCE FABRIC SHALL BE TACK WELDED TO POSTS AND RAILS AT 3'-0" o.c.

COST OF TACK WELDING TO BE INCLUDED IN THE PAY UNIT FOR CHAIN LINK FENCE AND GATES.

FENCE NOTES:

- DIMENSIONS INDICATED FOR PIPE, ROLL-FORMED, ARE OUTSIDE DIMENSIONS, EXCLUSIVE OF COATINGS.
- FABRIC, POSTS, GATES AND ALL HARDWARE SHALL BE CONSTRUCTED OF GALVANIZED STEEL (SEE SPECIFICATIONS).
- IF SOLID ROCK IS ENCOUNTERED, POSTS SHALL BE INSTALLED IN DRILLED HOLES IN THE ROCK AND GROUTED.
- PULL SHALL NOT NOT BE APPLIED TO POSTS SET IN CONCRETE FOUNDATIONS UNTIL THE CONCRETE HAS CURED A MINIMUM OF 72 HOURS.
- FENCE FABRIC SHALL FACE TOWARDS THE ROADWAY.
- MILL CERTIFICATION FOR CHAIN-LINK FENCE MATERIALS SHALL BE SUBMITTED TO THE ENGINEER IN ACCORDANCE WITH THE SPECIFICATIONS.
- GATES SHALL BE EQUIPPED WITH HEAVY DUTY LOCKS AND TWO SETS OF KEYS.

City of Jersey City
Division of Architecture, Engineering,
Traffic and Transportation



13-15 LINDEN AVE. EAST
JERSEY CITY, NEW JERSEY 07305
(201) 547-4412

1	Director Name Changed	6/10
NO.	REVISIONS	DATE

CITY OF JERSEY CITY
STANDARDS

NO.	REVISIONS	DATE

Chain Link Fence		
DRAWN BY	DESIGNED BY	CHECKED BY
PROJECT NO.	CADD FILE	SCALE

DRAWING
SHEET
11 17